TYCOON DREAM
航海大富翁

User Manual

Note: The product is based on real substance

Thanks for your choice of our products. My company reserves the right to revise or correct the Instruct Manual without otherwise notification due to products are being improved. In course of usage, in case you meet any problem not mention in this Instruct Manual, or update of version, please contact us, and we will offer more for you.

Product name: TYCOON DREAM
ISSUED date: Jule, 2008
Version of Instruction Manual : V1. 0

Contact us

CONTENT

Note ---- 4
Station parts introduce ---- 5
check packets ---- 6
Station installation ---- 7/8/9/10
Game introduction ---- 11
Game introduction ---- 11
Game rules ---- 11
Customer operation ---- 12/13/14
Game content introduction ---- 12
game start page ---- 12
Dice choice page ---- 12
Main game page ---- 13
Treasure-house small game "Pa Lai Pa Qu" ---- 13
Treasure-house small game "Fei Lai Fei QU" ---- 13
Treasure-house small game "Zha Lai Zha Qu" ---- 14
Treasure-house small game "Xuan Lai Xuan Qu" ---- 14
Interrogation point small game "Zhuan Lai Zhuan Qu" ---- 14
Interrogation point small game "Gun Lai Gun Qu" ---- 15/16/17/18
System setting ---- 16
Test ---- 18
Record ---- 18
Setting ---- 19
Fault and Solution ---- 20
Electronics Diagram ---- 20
IC board Golden finger diagram ---- 21
I/O pin connect diagram ---- 22
specification
Contact us

Note

Note

1.Inspact the machine to see the function of button ever two weeks ;

2.Clean the machine every week;

3.This machine should be put on smooth and steady ground;

4.Keep the machine on sunless room only

5.This machine is not waterproof, please it far away from water, not use in the dampness condition;

6.This machine should be kept away from mangetism and wireless electromagnetic wave

7.Pull out plugs bu its head , not by line

8.Do not scrape, cut or make over bending the power supply lines, and keep away from heavy pressure;

9.Power supply should be the standard power.

Note when move

1.The power should be off before do any movement ;

2.The machine will be marred if it moved with power on。

Note when install

1.Be sure the supply power is 220V;

2.The machine must be grounding ;

3.Do not touch the plug with wet hands;

4.Only technicians are allowed to inspect and repairs the machine. Power should be shut off before starting to repairs.

Specification

Machine specification

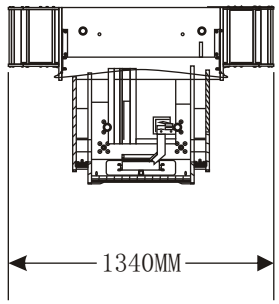

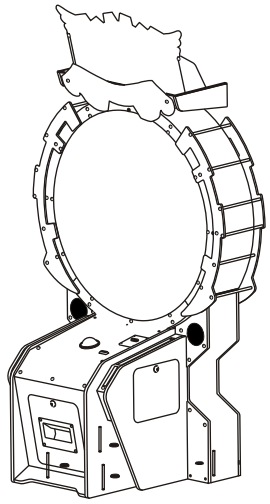

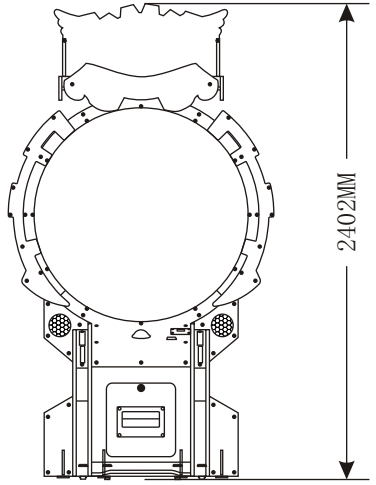

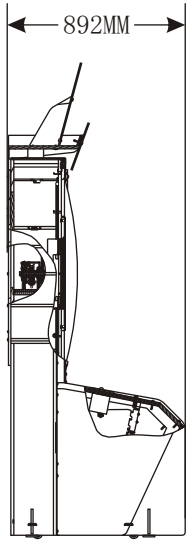

Rated power ： ? W　　specification：W1340＊D892＊H2402（MM）

Electronics Diagram

IC board Golden finger diagram（28Pin part ）

Description	Component face	A	B	Description	soldering tin face
GND		1	1	GND	
GND		2	2	GND	
VCC 5V		3	3	VCC 5V	
VCC 5V		4	4	VCC 5V	
N.C		5	5	N.C	
VCC 12V		6	6	VCC 12V	
N.C		7	7	N.C	
OUT3		8	8	OUT5	
OUT2	1P_START_LED	9	9	OUT4	
LEFTSOUND		10	10	GND(SOUND)	
RIGHTSOUND		11	11	OUT 6	
Red		12	12	Green	
Blue		13	13	Csync	
GND		14	14	CON 1	
SERVICESW	Service	15	15	OUT7	
COIN 0	Coin in	16	16	COIN 1	
START 1P	Start	17	17	START 2P	
UP 1P		18	18	UP 2P	
DOWN 1P		19	19	DOWN 2P	
LEFT 1P		20	20	LEFT 2P	
RIGHT 1P		21	21	RIGHT 2P	
BUT-A 1P		22	22	BUT-A 2P	
BUT-B 1P		23	23	BUT-B 2P	
BUT-C 1P		24	24	BUT-C 2P	
BUT-D 1P	Set up	25	25	BUT-D 2P	
SSR		26	26	HPSW	
GND		27	27	GND	
GND		28	28	GND	

I/O pin connect diagram（JP6 part）

Pin No.	2	4	6	8	10	12	14	16	18	20
I/O define	3.3V	GND	IRQ2							
Pin No.	1	3	5	7	9	11	13	15	17	19
	5V	IRQ1	PIO0	PIO1	PIO2	PIO3	PIO4	PIO5	PIO6	PIO7

Station Parts introduce

1	【Srart】button	2	Hopper
3	Ticket machine	4	Speaker
5	Coin in	6	Front box board
7	Light boxes wood components	8	Light boxes components
9	Glass cover	10	Coin in install componer
11	Adjust legs		

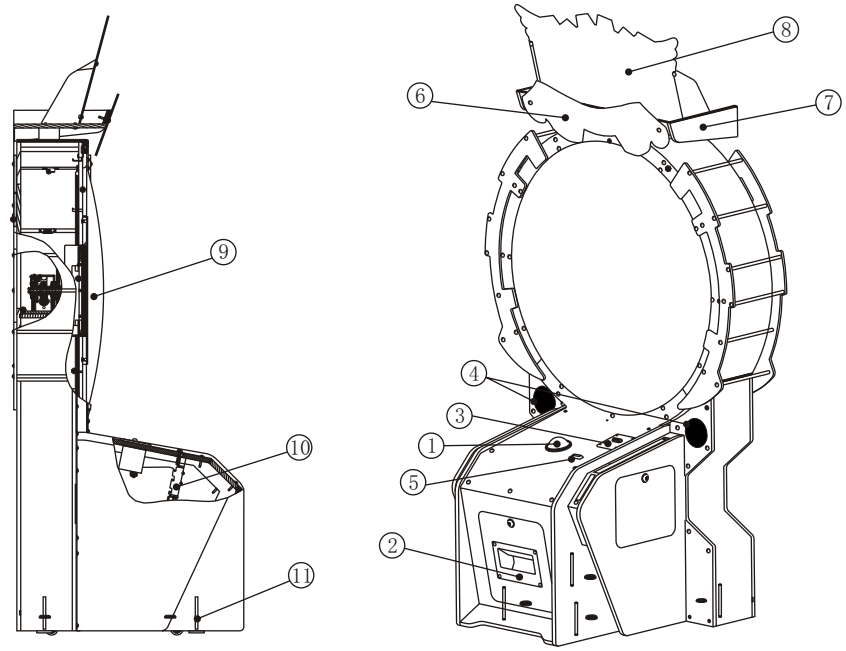

check packets

Check the packages when you get the good.

A complete product should include:
A: The main body ;
B: Light boxes components one unit;
C: Light boxes wood components one unit;
D: front light board one unit;
E: One pair of metal plates;

Parts should be include:
F: A package of tools（The tools include cross, screw ,nut, and so on）;
G: Manual;
H: one power line;
I: two keys ;
J: two locks (stand by)。

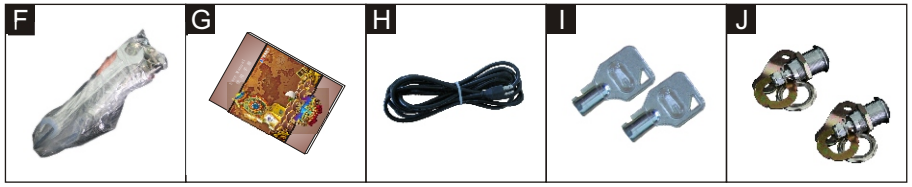

Fault and Solution

Fault	Reason and solution
Wheel problem ! the machine will resume	Wheel get error message during the game. The wheel will reset and fix error automatica after the end of this game , then the game get normally.
Wheel problem, please press ″start″ button to re-start	The wheel get error during the reset. Press 【start】, the wheel will resume and fix error automatical after the end of this game , then the game get normally.
Overtime when wait for the wheel signal ! Please shut off and check the lines, then re-start.	Lines between boards problem, or center control board problem. Please trun off the power, and check lines between boards, then re-start.

System setting

Record

Note: service time means "How many time of press service button instead of coin in" ; Treasure-house appear time means "how many time that the treasure-house appear during Treasure-house small game" 。

Set up

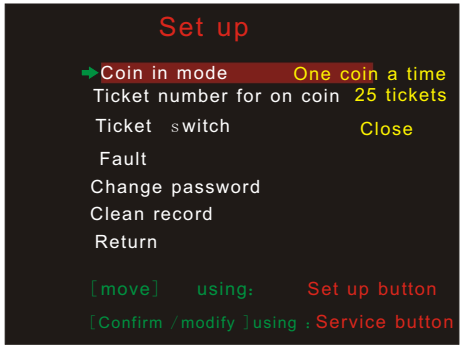

Coin in mode: three choice: one coin two time、one coin one time、two coin one time;

Ticket for one coin: set how many ticket will be gived for one coin, five choice: 20、25、30、35、40, different number different samll game rate, it is 1/7, 1/6, 1/5, 1/4, 1/3, it means every 7/6/5/4/3time will have one small game;

Ticket switch: control the open or close of ticket, default is open ;

default: make all the set to default setting;

Change password : default password is 80000;

clean record : clean all record ;

Return : Exit "set up" page, return to "system seeting" page。

Station installation

After check the packages, do the installation

1、as the pic. Following, connect the metal plates to the light boxes components by nut and screw ;

2、connect the finished part to the light boxes wood components by screws. As pic.

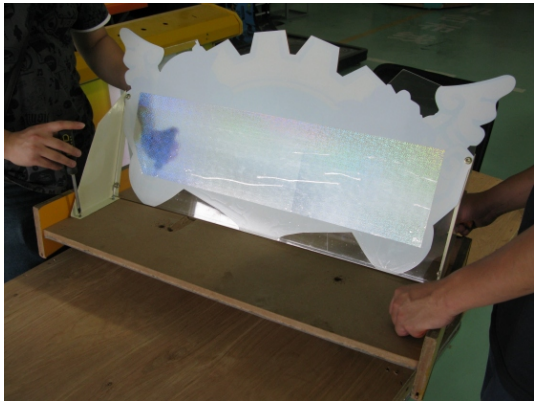

3、Install front light board to the step two finished part, by nut and screws. As follow

4、put the machine on a steady ground, open the back door. As follow

Wheel test: to see whether the wheel working (see wheel test page as follow);

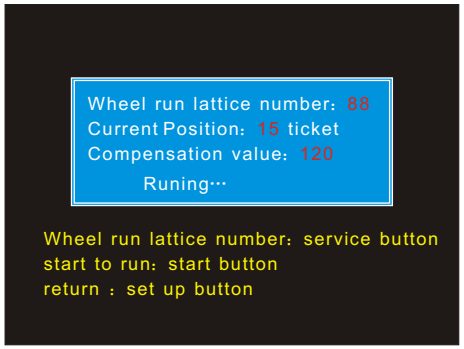
Wheel run lattice number: 88
Current Position: 15 ticket
Compensation value: 120
Runing…
Wheel run lattice number: service button
start to run: start button
return : set up button

Ticket out test : test whether the ticket machine woring (see ticket our test page as follow);

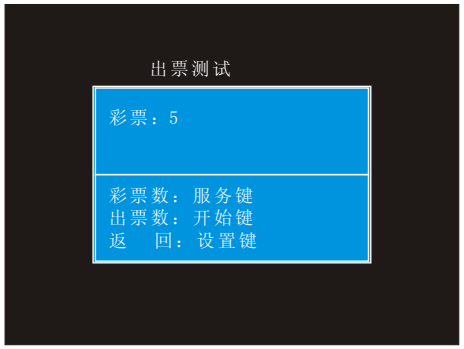

This page will remind you ″ticket error″ when the ticket is used up.

Return: exit ″test mode″, turn to page ″system setting″ .

System setting

Test

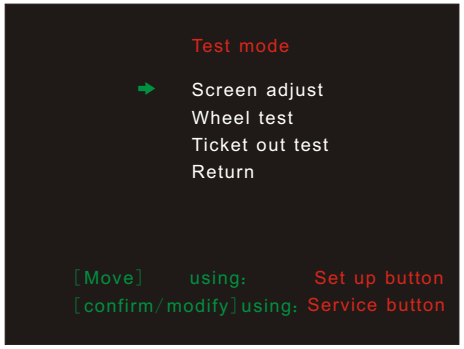

Screen adjust: to adjust the position、colour, and other of the screen. （See three page of follow）；

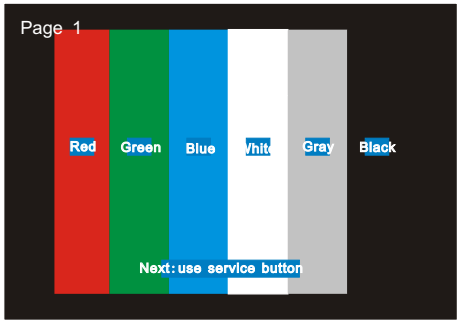

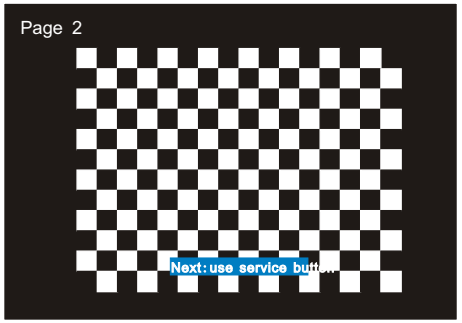

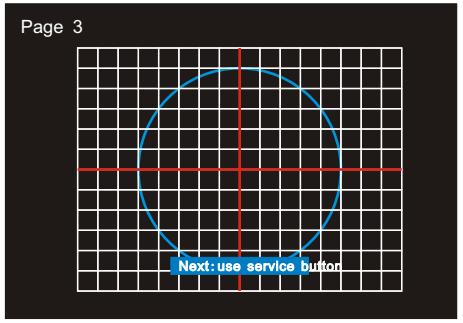

Station installation

5、Fix the step 3 finished part to the main body of the machine by screws, as follow. Close the back door.

6、find out the power line, connect the machine to the 220V AC power socket;（right pic.）

Station installation

7、Trun on the switch on the back side of the machine, to start the machine. All install finish.

System setting

Do kinds of function setting, and For information

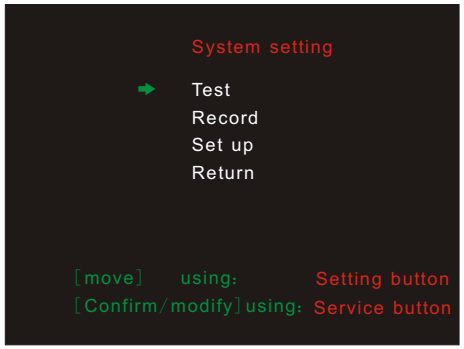

1、press 【set up】button to enter″system setting″page during the start Animation or DEMO show（as the pic. up）；

2、do finish the adjust and test of the machine on ″system setting″ page. Use 【set up】button to move cursor，【service】button to confirm the choice；

3、Some game system setting introduce：

⑴Test：enter test mode page, it have screen adjust, wheel test and ticket out test for choice.

⑵record：check the machine account on this page.

⑶set up：enter the correct default password “80000”, there have coin in mode, ticket number for one coin, ticket switch, default, change password, clean record for choice.

⑷return ： turn back to the game.

treasure-house small games “Xuan Lai Xuan Qu”

Game introduce:

1、press 【start】 once, the lighting side will be choose.

2、This is a “choice one between two” game, player can choice right or left to decide the destine of the boat.

3、Wrong choose will be end the game, right choose will send player to the next choice, there are totally sever promotion time.

4、Every promotion, the ticket will be double. After No.7 promotion, there will be ultimate treasure-house reward.

Interrogation point small games “zhuan Lai Zhuan Qu”

Game Introduce:

1、press 【start】, the finger stop number will be the ticket number.

2、The result is the summation number of pointed number, its right number and its left number.

Interrogation point small games “Gun Lai Gun Qu”

Game Introduce:

1、press 【start】 once, one idler wheel stop.

2、The result number will be the Product number of the three idler wheels.

Game Introduce :

1、Press button to choice dice number (see page 12 “game content introduce ----dice choice page)

2、The dice will shake during game time, player press button to stop it one by one.

3、The summation number of dice will be the lattice numbers for the finger go clockwise

4、When the wheel stops, the pointed number will be the ticket number. If the finger point “?”, there will be idler wheel or wheel small games come up random; if the finger point “treasure-house” mark, there will be one small game during “ Pa Lai Pa Qu”, “Fei Lai Fei Qu”,”Xuan Lai Xuan Qu”, “ Zha Lai Zha Qu” come up random.

Player Operation

”Player press 【start】 to begin the game, pay attention to the game interface on the screen; L circle on the picture is running on game result time, the number on the circle is the ticket number, treasure-house means get into random treasure-house small games, “?” means get into random interrogation point small games, K on the picture is finger, it point number or mark will be your reward. The picture on the left is the playing of treasure-house small game “ Zha Lai Zha Qu

game start page

Game start after coin in, turn to dice choice page:

Dice choice page

Here three kind of dice number keep on changing, the lighting top dice number will be the one player choice when press the button.

Main game page

1、the dice stop, the wheel will running some lattices, the number is the dice number.

2、the final result is the lattice which the wheel finger stop.

3、player get three result: ticket number, treasure-house and interrogation.

4、enter reasure-house small game when the result is a treasure-house（the machine will choice the small game by itself during four small games）;

5、enter interrogation point small game when the result is "？"（the machine will choice the small game by itself during two small games）;

Treasure-house small game "Pa Lai Pa Qu"

Game introduce:

1、press 【start】button once, the guy on the picture will climb one step, his climb speed up to the press speed.

2、Player control the airship to hit more fruit to get more ticket.

3、Treasure-house reward can be come up during the game.

Treasure-house small game "Fei Lai Fei QU"

Game introduce:

1、press 【start】on keep on press the button, the airship will be fly, the airship will be go down when stop.

2、player control the airship to hit more coin and umbrella to get more ticket.

3、Treasure-house reward can be come up during the game.

Treasure-house small game "Zha Lai Zha Qu"

Game introduce:

1、press 【start】once, the boat will give out one bomb;

2、player control the bomb to hit more fish to get more ticket.（the bigger the fish the more ticket）

3、Treasure-house reward can be come up during the game.